




SCR-Ident API Guide 1 - Start

Standard Connect & Result (SCR) API

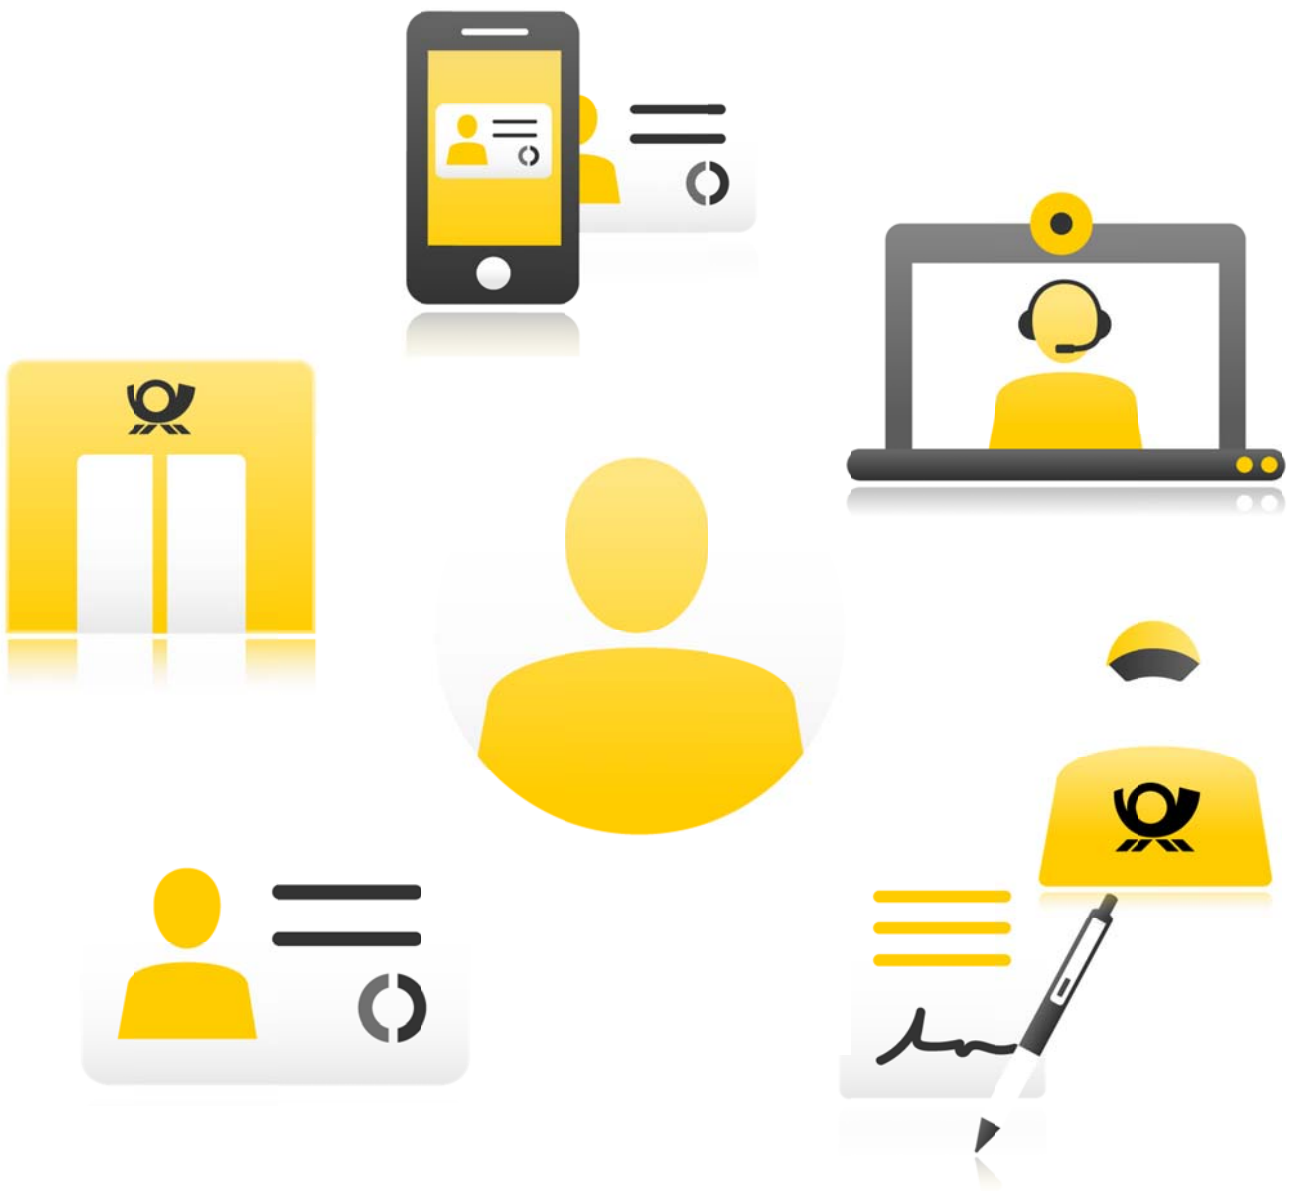

SCR-Ident API Guide 1 Start

Contents

- 1. Overview 2
 - Definitions 2
 - Preconditions 3
 - General Flow 3
 - Identification Classes 3
- 2. Details Start 4
 - Protocol 4
 - Host 4
 - Path 4
 - Authentication 4
 - Header 4
 - Body 5
 - UTF-8 encoded JSON 5
 - JSON structure 5
 - OrderData 5
 - CustomData 6
 - ProcessData 6
 - Callback URLs 7
 - ContactDataProvided 7
 - IdentificationDocumentProvided 8
 - DrivingLicenceProvided 9
 - Sample Request 10
 - Response 12
 - Errors 13
 - Example 1: Badly formatted email field 13
 - Example 2: Badly formatted date field 13
 - Example 3: Missing or wrong authorization 13
 - Example 4: Referenceld not unique 14
- 3. Redirect the User to POSTIDENT Portal or App 14
- 4. Create a New PI Coupon for Post Office 14
 - Path 14
 - Authentication 15
 - Header 15
 - Response 15
 - Errors 16
 - Example: Case not found 16
- 5. Availability Check of POSTIDENT System 16
 - Path 16
 - Response 17
 - Errors 17

Changelog

Date	Change
06 Aug 2019	Description for callback urls for Video changed Example for not unique referenceId updated
01 Feb 2019	New values 6 - 12 for IdentificationDocumentResult "type" added in the description
29 Jan 2019	Process description with client and partner added
23 Feb 2018	Notes on unsupported country codes added
30 Nov 2017	New paragraph "Requesting a PI Coupon via SCR"
16 Oct 2017	Document renamed to "SCR-Ident API Guide 1 Start"
04 Sep 2017	Some minor changes
15 Jun 2017	Some minor changes
02 Jun 2017	New identification class TKG added
09 Mar 2017	General Flow and JSON Structure > ContactDataProvided : Clarified handling of missing <code>ContactDataProvided</code> .
22 Dec 2016	JSON Structure > Process data : Added dedicated section for callback urls with details on the general behavior.
20 Dec 2016	JSON Structure > Process data : Added that the "declined" webhook is currently not used for video, but may be in the future.
19 Dec 2016	JSON Structure > Process data : Clarified when which callback is fired and added that HTTPS should be used for the webhook URL.
06 Dec 2016	Description of Identification Classes
14 Nov 2016	JSON Structure > Process data : Extension of supported platforms of callback urls
27 Oct 2016	Details Start > Host : Added example use of different clientids

1. Overview

The POSTIDENT Standard Connect & Results API (SCR-Ident) lets you start a new identification case.

Definitions

English	German	Description
client	Geschäftskunde, Auftraggeber	Business customer which is the principal for the identification process
clientId	Client ID	Identifier for a client to get access to a POSTIDENT or POSTID interface or API
user	ZIP, Endkunde	Private customer who wants to be identified
case	Vorgang	Container for an identification process; may contain one or more identifications of a user
identification	Identifikation	Identification attempt using a POSTIDENT identification method
identification method	POSTIDENT Verfahren	Method being used for a POSTIDENT identification <ul style="list-style-type: none"> • POSTIDENT via videochat (video) • POSTIDENT with new German national identity card (nPA) • POSTIDENT via photo • POSTIDENT in a post office (basic) • POSTIDENT via postman (comfort or special)
POSTID idcard	ID-Card	Container for an identification result; defines the data set
partner	Partner	Partner can process the video identification frontend process for the client

Preconditions

During setup you should have received

- clientId
- username and password for the REST API (required for authentication)
- data password (required to decryption of result data)

General Flow

Start an ident case:

1. Your web portal or mobile app collects personal information from the user in your business process
2. Your server creates a unique referenceld (optional)
3. Your server POSTs data to the POSTIDENT server and in return gets a caseld plus a start URLs for supported platforms (web, iOS, Android)
4. Then you have two options:
 - Immediate start: Your web portal or mobile app redirects the user with one of these URLs to the POSTIDENT web portal or to the POSTIDENT app (may require installation of the POSTIDENT app)
 - Delayed start: Your server sends the user an email with the case ID, the case URL and the expiration date of the case and its URLs
5. The user starts an identification in the POSTIDENT web portal with the start URL or in the POSTIDENT app with the caseld



Note

Important fields for the user flow are `salutation`, `firstName`, `lastName`, `email` and `mobilePhone`. They can be provided in `contactDataProvided` (see [below](#)).

If one of the fields `salutation`, `firstName` or `lastName` is empty, **all** fields will be cleared and a data entry dialogue will be displayed in the POSTIDENT system.

If all these fields are provided (including `email` and `mobilePhone`) the data entry dialogue will be skipped.

The Postident system allows the client to outsource the video identification frontend process to third parties (partners), e.g. a comparison portal. See SCR-Ident API Guide 2 Result for more details.

Identification Classes

POSTIDENT supports different identification classes. Which class has to be used depends on your business case and the regulatory conditions.

- **GwG (Money Laundering Act)**
The business is subject to the Money Laundering Act.
- **TKG**
The business is subject to the German telecommunication law.
- **Standard**
There are no special legal regulations for the business. Standard data privacy regulations apply.
- **Mobility (Photo)**
Same as Standard, tailored to car-sharing companies.

The class limits the scope of the result data. Please refer to the result guide for details.

2. Details Start

Protocol

HTTPS is used to ensure that all parameters are encrypted.

Host

Environment	URL
integration	on demand
productive	postident.deutschepost.de

Path

Start a new identification process with a POST request using the following URI:

`/api/scr/{version}/{clientId}/cases`

The URI contains the following elements:

Element	Description	Example
version	Use „v1“	v1
clientId	Provided by Deutsche Post. Uniquely identifying your access to the API. Different clientids can e.g. be used to choose different identification methods, as these can be - amongst other settings - configured for each clientId individually. Format: alphanumeric, uppercase (case sensitive).	1234ABCD

Example:

POST `/api/scr/v1/1234ABCD/cases`

Authentication

HTTPS and Basic Auth (RFC 2617) are used for the authentication. Username and password must be transmitted in the HTTP header according to Basic Auth.

Header

Element	Mandatory	Description	Example
Content-Type	Yes	Use "application/json"	application/json
Authorization	Yes	Basic <encoded username and pw>	Basic U0NSV1VMOIFqVk53d1QzUjgodQ==

Body

UTF-8 encoded JSON

The content has to be sent as UTF-8 encoded JSON.

JSON agreements


Please adhere to the following rules:

- attribute names: camel case style
- type:
 - primitive types: only double-quoted strings, no numbers
- usage of empty: you have two options
 - Option 1): attribute is left off
 - Option 2): attribute is written with null

If these rules are violated, you will receive a 400 http error (see below).

JSON structure

The expected JSON structure:

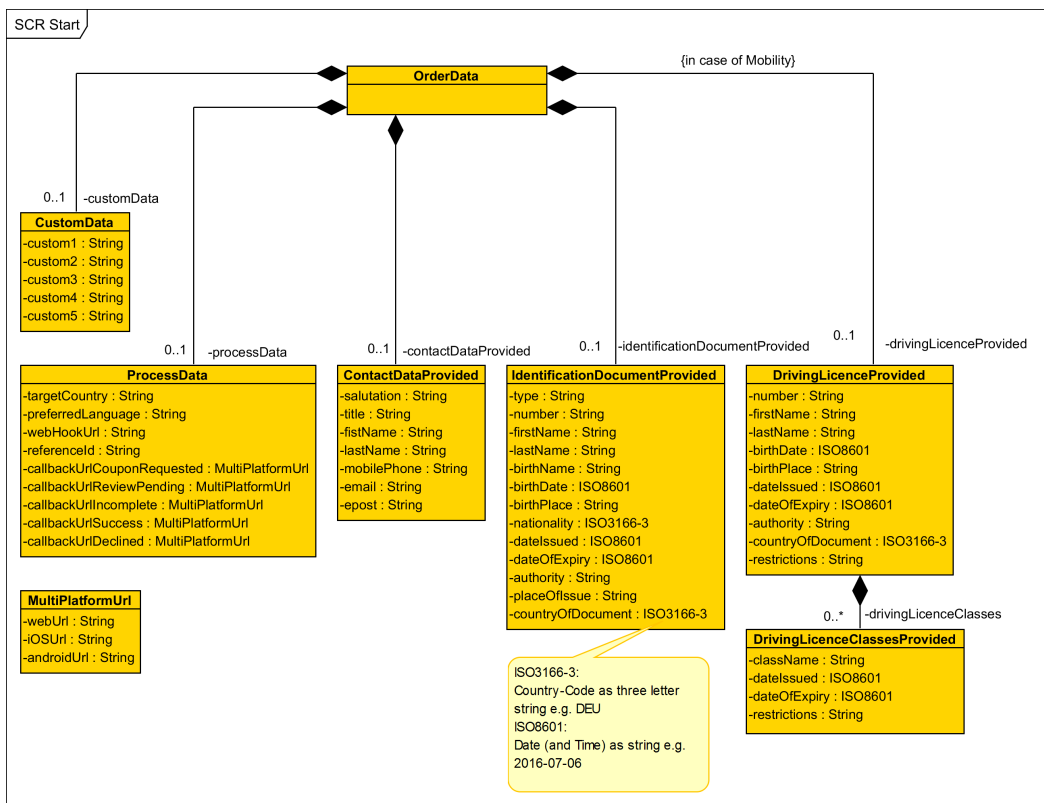

OrderData

Your configuration and initial data to start a case. OrderData consists of five objects:

- customData - custom properties, which will be sent back to you, along with the result data
- processData - properties, which control the behavior of the ident case, such as callback URLs.
- contactDataProvided - contact data of the user, which is already known
- identificationDocumentProvided - data in the identification document of the user, which is already known

- `drivingLicenseProvided` (*in case of mobility*) - data in the driving licence document of the user, which is already known

All objects are optional, including OrderData itself. It is possible to create a case without the above data.

CustomData

Parameter	Mandatory	Max. Length	Description	Example
custom1	no	100	Custom text field in order to pass your own identifiers, labels etc. You will get this information back in the result data.	
custom2	no	100	See custom1	
custom3	no	100	See custom1	
custom4	no	100	See custom1	
custom5	no	100	See custom1	

ProcessData

Several parameters in the following table contain callback URLs. Please see section Callback URLs below this table for details.

Parameter	Mandatory	Max. Length	Description	Example
targetCountry	no	3	Country from which the identification is requested. ISO 3166-1 ALPHA-3 plus RKS for Kosovo. If not provided, PI application will set the default value DEU.	DEU
preferredLanguage	no	5	Preferred language of the user, e.g. for emails Possible values: <ul style="list-style-type: none">• DE_DE• EN_UK If not provided, PI application will set the default value DE_DE. NOTE: EN_UK is not yet supported by POSTIDENT portal and app	DE_DE
webHookUrl	no	500	URL for push notifications back to your application in case of notifications or preliminary or final results. It is recommended to secure the communication using HTTPS. See Results API Guide for more details.	<code>https://democompany.com/api/piwebhook</code>
webHookUrlPartner	no	500	URL for push notifications back to the application of your partner in case of notifications or preliminary or final results. It is recommended to secure the communication using HTTPS. See Results API Guide for more details about webhook and partner.	<code>https://democompany.com/api/piwebhook</code>
referenceld	no	14	For method: basic Unique id generated by your system to be printed on the PI coupon for an identification in the post office. After the identification in the post office, the referenceld will be used to reassign the result from the post office to the originating case in the PI application. Otherwise a new case with a new caseld will be created and delivered by the PI application. If not provided, the caseld is automatically used as referenceld. If provided, the referenceld must be unique for the scope of the clientId; if not unique, the case cannot be started in the PI application and you receive http error 409.	
callbackUrlCouponRequested	no	500	For method: basic Redirect or callback URL for user after download of PI Coupon. Used by POSTIDENT portal to display a button for the user back to your application. If not provided, the redirect button will not be displayed. <i>Currently supported platforms: web</i>	multiPlatformUrl object: <pre>{ "webUrl": "https://...", "iosUrl": "string", "androidUrl": "string" }</pre>

callbackUrlReviewPending	no	500	<p>For method: photo</p> <p>Redirect or callback URL for user in case of review pending (e.g. after photos sent or videochat between agent and user finished). Regardless of the preliminary result - success or declined - the same "review pending" page and callback URL is being used as no final status is available and can hence not be communicated to the user.</p> <p>Used by POSTIDENT portal or mobile app to display a button for the user back to your application or app. Provide a URL for each POSTIDENT platform that shall display the redirect button. If not provided, the redirect button will not be displayed.</p> <p><i>Currently supported platforms: web, iOS, Android</i></p>	multiPlatformUrl object
callbackUrlIncomplete	no	500	<p>For method: video (mobile scenario with client app, not used for web)</p> <p>Redirect or callback URL for user after incomplete result. Used by POSTIDENT mobile app to display a button for the user back to your application or app. Provide a URL for each POSTIDENT platform that shall display the redirect button. If not provided, the redirect button will not be displayed.</p> <p>Your app must be able to cope with the incomplete video identification, e.g. offer a re-start of the video method or the start of a new alternative method like POSTIDENT in a post office (basic).</p> <p><i>Currently supported platforms: iOS, Android</i></p>	multiPlatformUrl object
callbackUrlSuccess	no	500	<p>For methods: video</p> <p>Redirect or callback URL for user in case of review pending (videochat between agent and user finished) or after success or declined result. Regardless of the preliminary result - success or declined - the same "review pending" page and callback URL is being used as no final status is available and can hence not be communicated to the user.</p> <p>Used by POSTIDENT portal or mobile app to display a button for the user back to your application or app. Provide a URL for each POSTIDENT platform that shall display the redirect button. If not provided, the redirect button will not be displayed.</p> <p><i>Currently supported platforms: web, iOS, Android</i></p> <p>For method: npa</p> <p>Redirect or callback URL for user after success result. Used by POSTIDENT portal or mobile app to display a button for the user back to your application or app. Provide a URL for each POSTIDENT platform that shall display the redirect button. If not provided, the redirect button will not be displayed.</p> <p><i>Currently supported platforms: web, iOS, Android</i></p> <p>For method: photo</p> <p>Redirect or callback URL for user after success result. The Web URL will be included in E-Mail to user in case PI application is responsible for E-Mail communication. See Result Guide for more details.</p> <p><i>Currently supported platforms: web, iOS, Android</i></p>	multiPlatformUrl object
callbackUrlDeclined	no	500	<p>For method: photo</p> <p>Redirect or callback URL for user after declined result. The Web URL will be included in the E-Mail sent to the user in case the PI system is responsible for the E-Mail communication. See Result Guide for more details.</p> <p><i>Currently supported platforms: web, iOS, Android</i></p>	multiPlatformUrl object

Callback URLs

Depending on the platform, the corresponding URL from the multiPlatformUrl object will be used. On mobile platforms, the web URL will be used if the iosUrl resp. androidUrl is not set.

ContactDataProvided




Initial contact data of the user provided by the client (business customer). Some of the parameters are necessary during the identification process to contact the user by email and mobile phone: salutation, firstName, lastName, mobilePhone, and email. If not provided, the user will be asked by the POSTIDENT system, before he can proceed with the identification process.

Parameter	Mandatory	Necessary for ident process	Max Length	Description	Example
salutation	no	x	6	Supported values: <ul style="list-style-type: none"> • 1 = Mr • 2 = Mrs. Necessary for the identification process. ⚠ If not provided, the fields salutation, firstName and lastName will be cleared as well, and the user will be asked.	1
title	no		35	Title as part of the salutation, e.g. "Dr." Currently not used by POSTIDENT system	Dr.
firstName	no	x	35	Necessary for the identification process. ⚠ If not provided, the fields salutation, firstName and lastName will be cleared as well, and the user will be asked.	Max
lastName	no	x	35	Necessary for the identification process. ⚠ If not provided, the fields salutation, firstName and lastName will be cleared as well, and the user will be asked.	Muster
mobilePhone	no	x	20	Country code plus phone number. Blanks are allowed and will be ignored. Necessary for the identification process. ⚠ If not provided, the field will be cleared as well, and the user will be asked.	Germany: +49 171123456789 or +49 171 123456789 USA: +1123456789010 or +1 123 456789010
email	no	x	320	Necessary for the identification process. ⚠ If not provided, the field will be cleared as well, and the user will be asked.	max. muster@gmail. com
epost	no		320		max. muster@epost.de
streetAddress	no		70		Musterstrasse 11a
appendix	no		55		Hinterhaus
postalCode	no		11		53113
city	no		55		Bonn
country	no		3	ISO-3166 ALPHA-3 plus RKS for Kosovo ⚠ If the provided value is not valid, clear the field and try again without a country.	DEU

IdentificationDocumentProvided

Initial data of the identificationDocument provided by the client (business customer).

Parameter	Mandatory	Max. Length	Description	Example
-----------	-----------	-------------	-------------	---------

type	no	enum	Possible values: 1 = ID Card (Personalausweis) 2 = Passport (Reisepass) 3 = Residence Title (Aufenthaltstitel) 4 = Temporary ID-Card (vorläufig ausgestellter Personalausweis) 5 = Temporary Passport (vorläufig ausgestellter Reisepass) 6 = 1954 Convention Travel Document (Stateless Person) (Reiseausweis für Staatenlose (Übereinkommen von 1954)) 7 = 1951 Convention Travel Document (Refugee) (Reiseausweis für Flüchtlinge (Übereinkommen von 1951)) 8 = 1946 Convention Travel Document (Foreigner) (Reiseausweis für Ausländer (Abkommen von 1946)) 9 = Service Passport (Dienstpass) 10 = Diplomatic Passport (Diplomatenpass) 11 = Official Passport (Ministerialpass) 12 = Official or Diplomatic Passport (Ministerial- oder Diplomatenpass)	1
number	no	20		T22000129
firstName	no	35	All first names as printed on the identification document	Max Walter
lastName	no	35	Exact last name as printed on identification document; may include title like "Dr."	Muster
birthName	no	35	Only if differing from last name Do not include prefixes like „geb.“ or „Geborene“	Meier
birthDate	no	10	ISO 8601 format: YYYY-MM-DD	1969-07-31
birthPlace	no	55		Berlin
nationality	no	3	ISO-3166 ALPHA-3 plus RKS for kosovarisch  If the provided value is not valid, clear the field and try again without a nationality.	DEU
streetAddress	no	70	Name of street and house number concatenated.	Hauptstraße 10
postalCode	no	11	ZIP code of city	10000
city	no	55	Name of city	Berlin
country	no	3	ISO-3166 ALPHA-3 plus RKS for Kosovo  If the provided value is not valid, clear the field and try again without a country.	DEU
dateIssued	no	10	ISO 8601 format: YYYY-MM-DD	2010-05-20
dateOfExpiry	no	10	ISO 8601 format: YYYY-MM-DD	2020-05-19
authority	no	100		Stadt Berlin
placeOfIssue	no	55	Field in German passport only	
countryOfDocument	no	3	ISO-3166 ALPHA-3 plus RKS for Kosovo  If the provided value is not valid, clear the field and try again without a countryOfDocument.	DEU

DrivingLicenceProvided

Initial data of the driving licence provided by the client (business customer).

Parameter	Mandatory	Max. Length	Description	Example
number	no	20		A 12345678
firstName	no	35	All given names	Max
lastName	no	35		Muster

birthDate	no	10	ISO 8601 format: YYYY-MM-DD	1969-07-31
birthPlace	no	55		Berlin
drivingLicenceClasses (array of objects) <ul style="list-style-type: none"> ▪ className ▪ dateIssued ▪ dateOfExpiry ▪ restrictions 	no	array <ul style="list-style-type: none"> • 10 • 10 • 10 • 35 		A, 1.1.2010, 31.12.2018 B, 1.1.2012, 31.12.2020
restrictions	no	35		
dateIssued	no	10	ISO 8601 format: YYYY-MM-DD	2011-05-30
dateOfExpiry	no	10	ISO 8601 format: YYYY-MM-DD	2033-01-19
authority	no	100		Stadt Bonn
countryOfDocument	no	3	ISO-3166 ALPHA-3 plus RKS for Kosovo ⚠ If the provided value is not valid, clear the field and try again without a countryOfDocument.	DEU

Sample Request

```

POST <host>/api/scr/v1/1234ABCD/cases

header
Content-Type: application/json
Authorization: Basic <encoded username and pw>
Accept: application/json

{
  "customData": {
    "custom1": "REF_101485489",
    "custom2": "Kampagne A357"
  },
  "processData": {
    "targetCountry": "DEU",
    "preferredLanguage": "DE_DE",
    "webHookUrl": "https://musterbank.eu/api/pi/webhooklistener",
    "referenceId": "YR9W91GEZK24",
    "callbackUrlCouponRequested": {
      "webUrl": "https://musterbank.eu/picallback/coupondownloaded.html"
    },
    "callbackUrlReviewPending": {
      "webUrl": "https://musterbank.eu/picallback/reviewpending.html"
    },
    "callbackUrlIncomplete": {
      "webUrl": "https://musterbank.eu/picallback/incomplete.html"
    },
    "callbackUrlSuccess": {
      "webUrl": "https://musterbank.eu/picallback/success.html"
    },
    "callbackUrlDeclined": {
      "webUrl": "https://musterbank.eu/picallback/declined.html"
    }
  },
  "contactDataProvided": {
    "salutation": "2",
    "firstName": "Erika",
    "lastName": "Mustermann",
    "address": {
      "city": "Köln",
      "streetAddress": "Heidestr. 17",
      "postalCode": "51147",
      "country": "DEU"
    }
  },
  "identificationDocumentProvided": {
    "birthName": "Gabler",
    "nationality": "DEU",
    "firstName": "Erika",
    "lastName": "Mustermann",
    "placeOfIssue": "",
    "countryOfDocument": "DEU",
    "birthDate": "1964-08-12",
    "birthPlace": "Berlin",
    "dateIssued": "2010-11-01",
    "dateOfExpiry": "2020-10-31",
    "address": {
      "city": "Köln",
      "streetAddress": "Heidestr. 17",
      "postalCode": "51147",
      "country": "DEU"
    },
    "type": "1",
    "authority": "Stadt Köln",
    "number": "T01012148"
  }
}
...

```

Response

HTTP status codes in the response for success:

Http Status Code	Message	Possible Cause
201	Created	The case was successfully created

You will also get application/JSON containing the following information:

Parameter	Description	Example
caseId	Unique id of the POSTIDENT system for a case, while case is in POSTIDENT system. May be reused after case is deleted in POSTIDENT system.	123456789ABC
validUntil	Date and time until which caseId and start/restart URLs will expire; after that the case cannot be started or restarted by the user ISO 8601 format, accuracy in seconds, the offset to Zulu time ±hh:mm at the end	2016-04-28T23:59:59+01:00
webStart (object): <ul style="list-style-type: none">caseURL	Start/restart information for web <ul style="list-style-type: none">Url to start or restart the case in a web browser. Use this url to redirect the browser of the user or send him an email with this URL. If you send an email, do not forget to inform the user on the expiration date of the URL	https://<host>/identportal/?vorgangsnummer=123456789ABC
iosStart (object) <ul style="list-style-type: none">packageNamecaseUrlScheme	Start/restart information for iOS <ul style="list-style-type: none">Information to check, whether the POSTIDENT app is installed or not in order to trigger the installation process. Supported value:<ul style="list-style-type: none">Production: de.deutschepost.postidentInformation to open POSTIDENT app in case it is already installed and transmit the caseId	<ul style="list-style-type: none">packageName: de.deutschepost.postidentcaseUrlScheme: postident://cases/{caseId}
androidStart (object) <ul style="list-style-type: none">caseUrlSchemepackageName	Start/restart information for Android See iosConfig	<ul style="list-style-type: none">packageName: de.deutschepost.postidentcaseUrlScheme: postident://cases/{caseId}

Response example:

```
{
  "caseId": "YR9W91GEZK24",
  "validUntil": "2016-11-02T14:23:04+01:00",
  "webStart": {
    "caseURL": "https://postident.deutschepost.de/identportal/?vorgangsnummer=YR9W91GEZK24"
  },
  "iosStart": {
    "caseUrlScheme": "postident://cases/YR9W91GEZK24",
    "packageName": "de.deutschepost.postident"
  },
  "androidStart": {
    "caseUrlScheme": "postident://cases/YR9W91GEZK24",
    "packageName": "de.deutschepost.postident"
  }
}
```

Errors

HTTP status codes in the response for error situations:

Http Status Code	Message	Possible Cause
400	Bad request	Invalid order data, e.g. - JSON agreement violated - Mandatory field missing - Field wrongly formatted - Field value too long See the „key“ field of the error json to see which field is wrong
401	Unauthorized	Wrong or missing authorization key, e.g. - Wrong or missing username or password - Clientid not found or not configured for usage of Standard Connect API
409	Conflict: Reference ID not unique	Value of field referenceld is leading to a case, which already exists. A POST with an existing referenceld is not possible

The Response body will contain additional information regarding the error. See below some examples.

Example 1: Badly formatted email field

```

HTTP status code: 400
{
  "apiVersion": "v1",
  "error": {
    "code": 400,
    "message": "Bad Request"
    "errors": [{
      "reason": "incorrect value",
      "errorcode": "90005",
      "key": "contactDataProvided.email",
      "message": "The provided value is not valid."
    }]
  }
}
    
```

Example 2: Badly formatted date field

```

HTTP status code: 400
{
  "apiVersion": "v1",
  "error": {
    "code": 400,
    "message": "Bad Request"
    "errors": [{
      "reason": "wrong date format",
      "errorcode": "90001",
      "key": "identificationDocumentProvided.dateIssued",
      "message": "Date field format must be YYYY-MM-DD."
    }]
  }
}
    
```

Example 3: Missing or wrong authorization

```

HTTP status code: 401
{
  "apiversion": "v1",
  "errors": [
    {
      "errorcode": "90114",
      "reason": "unauthorized",
      "key": "Authorization",
      "message": "Authorization failed."
    }
  ]
}

```

Example 4: ReferenceId not unique

```

{
  "apiversion": "v1",
  "errors": [
    {
      "errorcode": "90016",
      "reason": "referenceId not unique",
      "key": "orderData.processData.referenceId",
      "message": "Case with CaseId YR9W91GEZK24already uses ReferenceId."
    }
  ],
  "caseId": "YR9W91GEZK24"
}

```


3. Redirect the User to POSTIDENT Portal or App

The response object contains the new case ID, start URLs for different platforms, and the expiration date of the case and its URLs. Use this information to redirect the user to the POSTIDENT portal or app. You have the following options:

- Immediate start: Your web portal or mobile app redirects the user directly (may require installation of the POSTIDENT app).
- Delayed start: Your server sends an email to the user containing case ID, case URL and expiration date of case and URL.

4. Create a New PI Coupon for Post Office

It is possible to create new PI coupons for an existing case. PI coupons are used by the user for his or her identification in post office. The resource is preliminary and not yet included in the standard API. It must be activated by business customer support and is disabled by default. It only supports HTTP post method and should be performed without a body.

 The resource can deliver a PI coupon file as printable file (PDF).

- Requirements:
- case in status new or in progress
 - basic identification does not exist yet or is in a suitable status ('started', 'coupon requested', 'incomplete')
 - max. limit of PI coupons for case not reached
- A basic identification will be created if necessary. Afterwards, the basic identification will be in status 'coupon requested'.

Path

Create a new PI coupon for an existing case using the following URI:

```
POST /api/scr/{version}/{clientId}/cases/{caseId}/piCouponByFile
```

Example:

POST /api/scr/v1/1234ABCD/cases/YR9W91GEZK24/piCouponByFile

Authentication

HTTPS and Basic Auth (RFC 2617) are used for the authentication. Username and password must be transmitted in the HTTP header according to Basic Auth.

Header

Element	Mandatory	Description	Example
Content-Type	Yes	Use "application/json"	application/json
Authorization	Yes	Basic <encoded username and pw>	Basic U0NSV1VMOIFqVk53d1QzUjgodQ==

Response

HTTP status codes in the response for success:

Http Status Code	Message	Possible Cause
201	Created	The pi coupon was successfully created

You also get application/JSON containing the following information:

Parameter	Type	Description	Example
couponId	string	Unique ID of the PI coupon.	33
caseId	string	Case ID to which PI coupon belongs; printed on printable PI coupons.	12345678ABCD
validUntil	string	Date and time until which case ID will expire. ISO 8601 format, accuracy in seconds, offset to Zulu time at the end.	2016-01-28T23:59:59+01:00
referenceId	string	Reference ID to which PI coupon belongs; printed on printable PI coupons	70UE778ER8GH
accountingNumber	string	Accounting number to which PI coupon belongs; printed on printable PI coupons.	87122222143703
couponFileType	string	Type of pi coupon file. Valid values are: <ul style="list-style-type: none"> printable (human readable PDF file; includes data matrix code for scanning in post office; ready to use for user and post office) The type has to be configured in your client account.	printable
mimeType	string	Mime type of PI coupon file.	application/pdf
fileName	string	Name of PI coupon file. Format: <caseId>_pi-coupon_<coupon file type>.<file extension>	12345678ABCD_pi-coupon_printable.pdf
fileSize	integer	File size in bytes.	7007
documentData	string	Base64 coded binary data of document.	JVBERi0xLjQKJeLjz9MK...

Response Example:


```
{
  "couponId": "33",
  "caseId": "12345678ABCD",
  "validUntil": "2017-12-05T12:38:38+01:00",
  "referenceId": "70UE778ER8GH",
  "accountingNumber": "8712222143703",
  "couponFileType": "dmc_v2",
  "mimeType": "application/pdf",
  "fileName": "12345678ABCD_pi-coupon_printable.pdf",
  "fileSize": 7007,
  "documentData": "JVBERi0xLjQKJeLjz9MKMS..."
}
```

Errors

The following table describes HTTP status codes in the response for error situations. In case of HTTP status code 401 and 409 there will be additional information delivered.

Http Status Code	Message	Possible Cause
401	Unauthorized	Wrong or missing authorization key (errorcode 90114), e.g. - wrong or missing username or password - clientid not found or not configured for usage of Standard Connect API - resource is not activated for clientid (errorcode 90124)
404	Not found	Case with caseId not found
409	Conflict	Basic identification in wrong status (errorcode 90307) or maximum number of possible PI coupons exceeded (errorcode 90308)
410	Gone Closed case	Updating a closed case is not possible

Example: Case not found

```
HTTP status code: 404
{
  "apiversion": "v1",
  "errors": [
    {
      "errorcode": "90011",
      "key": "not found",
      "message": "Case not found."
    }
  ]
}
```

5. Availability Check of POSTIDENT System

SCR provides a particular 'alive' resource to check the availability of the POSTIDENT system. Protocol, security and header for the alive resource are the same as above. The alive resource can be accessed under the same authentication, which is used for the SCR service, or with a dedicated alive service account. The dedicated account can only access the alive resource. Access to case data is denied, so it can be used by monitoring systems that run in another environment.

Path

Check the current availability of the POSTIDENT system by using the following URI:

/api/scr/{version}/{clientId}/alive

The URI contains the following elements:

Element	Description	Example
version	Use „v1“	v1
clientId	Provided by Deutsche Post. Uniquely identifying your access to the API. Format: alphanumeric, uppercase (case sensitive).	1234ABCD

Example:

GET /api/scr/v1/1234ABCD/alive

Response

If available, SCR will respond with the following JSON object:

```
{
  "status": "OK"
}
```

The JSON object contains only one field:

Parameter	Mandatory	Max. Length	Description	Example
status	no	3	Delivers the result of the alive check. Two values are possible: <ul style="list-style-type: none"> • OK • NOK 	OK

There are three scenarios which are possible in this context:

1. The system is available and running fine
2. The first stage is running fine, but at least one component of the system is not available
3. The whole system is not available

SCR alive service will response differently in all above mentioned cases:

1. The system delivers an "OK"
2. The system delivers a "NOK"
3. The system delivers a HTTP error



Note

Please do not call this service more than 2 times per minute.

Errors

Http Status Code	Message	Possible Cause
401	Unauthorized	Wrong or missing authorization key, e.g. - Wrong or missing username or password - clientId not found or not configured for usage of Standard Connect API

500	Internal server error	If the system has an internal issue, status code 500 will be delivered together with an error message.
-----	-----------------------	--